

## Description

With no specialist tools or knowledge needed for installation and operation, the Fireray One is a standalone beam smoke detector that prioritises ease of installation. Using the Fireray One, it couldn't be easier to bring the benefits of beam smoke detection to your application:

- Auto-Alignment™ – just steer the laser onto the Reflector, then at the flick of a switch, it aligns itself. 8 times faster than previous detectors
- One person installation – everything can be done by one person
- One standalone product – no specialist tools required; minimal prior knowledge and training needed



Application	Challenge	Fireray One
Small warehouses	Cost effective protection	A standalone beam detector with all the benefits of Fireray Reflective beam detection
	Simple installation	Single point of wiring and commissioning
New buildings	Settling of the building can cause other beam detectors to misalign and result in nuisance alarms	Building Movement Tracking™ automatically compensates for natural building movement to continuously maintain alignment

## Technical Specification

Detection performance	
Detection range	16 to 164ft (5 to 50m) 16 to 394ft (5 to 120m) with Reflective Long Range Kit
Alignment method	Laser assisted, Auto-Alignment™. Manual alignment – optional setting
Auto-Alignment™ protocol	Background check, Box search, Adjust and Center
Building Movement Tracking™	Compensates for natural shifts in alignment from building movement*
Contamination Compensation	Compensates for gradual build-up of contamination on the optical surfaces
Light Cancellation Technology™	Compensates for high levels of sunlight and artificial lighting
Optical wavelength – smoke detection	850nm near infrared (invisible)
Integrated laser – laser alignment	650nm visible. Class 3R <5mW
Dynamic Beam Phasing	Allows beam detectors to be mounted facing each other with the reflectors in the middle. Eliminates false alarms caused by crosstalk between beams
Signal output	Individual Alarm and Fault relays (VFCO) 0.5A @ 30 VDC
Programmable User Settings	
Alarm response threshold levels	25% (1.25dB) – Fastest response to smoke 35% (1.87dB) – Default value 55% (3.46dB) – High immunity to false alarms, slow response to smoke 85% (8.23dB) – Highest immunity to false alarms, slowest response to smoke Configured via the integrated user interface
Delay to Alarm	10 seconds, for momentary partial obstruction of the beam path
Delay to Fault	10 seconds, for momentary obstruction of the beam path

• Document # DS-FROne-1.0    • Copyright © 2022 Harding Instruments Co. Ltd.    • All Specifications are subject to change without notice    • Printed in Canada



9564 Yellowhead Trail NW    Tel 780.462.7100  
Edmonton, Alberta, T5G 0W4    Fax 780.450.8396  
[sales@harding-tech.com](mailto:sales@harding-tech.com)    [www.harding-tech.com](http://www.harding-tech.com)



Represented by:



# Fireray Fireray One Optical Smoke Detector

### User features

Integrated user interface	Alignment mode switch, alignment directional buttons and configuration switches for alarm response threshold
Alignment status indication	2 Green LEDs and 1 Yellow LED
System status indication	Normal operation – Green LED flashing every 10 seconds Alarm condition – Red LED flashing every 5 seconds Fault condition – Yellow LED flashing every 10 seconds for obscuration or every 5 seconds for contamination
Cleaning	Flat front face with enclosed optics. Cleaning the optics does not affect alignment

### Design parameters

Separation distance between Detector and Reflector	16 to 164ft (5 to 50m) 164 to 394ft (50 to 120m) with Reflective Long Range Kit
Beam path clearance	3.3ft (1m) in diameter from center line between Detector and Reflector
Lateral spacing between detectors	60ft (18.3m) maximum as per NFPA 72
Detector location	Within the ceiling jet flow (top 10% of the floor to ceiling height) unless otherwise stipulated
Detector dimensions	Width 5.12" x Height 7.13" x Depth 5.28" (W 130mm x H 181mm x D 134mm) (see diagram)
Reflector dimensions	Up to 164.0ft (50m) separation distance – 3.94" x 3.94" x 0.36" (100mm x 100mm x 9mm) Up to 393.6ft (120m) separation distance - Four reflectors 7.88" x 7.88" x 0.36" (200mm x 200mm x 9mm) in square pattern
Product weight	Detector – 1.55lbs (0.7 kg); Reflector – 0.22lbs (0.1 kg)
Multi-detector arrangement	Dynamic Beam Phasing allows for Detectors to face each other with the reflectors in the middle
Housing color	White RAL9016, UV stable

### Electrical specifications

Operating voltage	14 to 36 VDC
Operating current (constant) all operational modes	All operational modes – 5mA; Fast alignment mode – 33mA

### Field Wiring

Cable gauge and type	2 core, dedicated, 24 to 14 AWG (0.5 to 1.6mm) System compatible with fireproof and non-fireproof cable meeting local installation standards
Cable entry	3 knock-out locations capable of accepting M20, 1/2" or 3/4" glands 4 drill-out locations capable of accepting glands up to 0.82" (21mm) diameter

### Test and maintenance

Alarm test	Optical alarm test using Commissioning and Maintenance Kit accessory
------------	--

### Environmental specifications

### Environmental specifications

Operating temperature: -4 to 131°F (-20 to +55°C)	Fault level / Rapid obscuration ( $\Delta \leq 2$ seconds): $\geq 85\%$
Storage temperature: -40 to 185°F (-40 to +85°C)	Maximum angular alignment of Reflective Detector: $\pm 4.5^\circ$ ( $\pm 70^\circ$ with adjustment bracket accessory)
Relative humidity (non-condensing or icing): 0 to 93%	Maximum angular misalignment of Reflective Detector: $\pm 0.5^\circ$
IP rating: IP55	Maximum angular misalignment of Reflector: $\pm 5^\circ$
Housing flammability rating: UL94 V0 polycarbonate All figures are quoted for 77°F (25°C)	

### Listing

- UL-S3417
- ULC-S3417
- CSFM-7260-104

• Document # DS-FROne-1.0    • Copyright © 2022 Harding Instruments Co. Ltd.    • All Specifications are subject to change without notice    • Printed in Canada




9564 Yellowhead Trail NW    Tel 780.462.7100  
Edmonton, Alberta, T5G 0W4    Fax 780.450.8396  
[sales@harding-tech.com](mailto:sales@harding-tech.com)    [www.harding-tech.com](http://www.harding-tech.com)



Represented by:

## Example wiring configuration

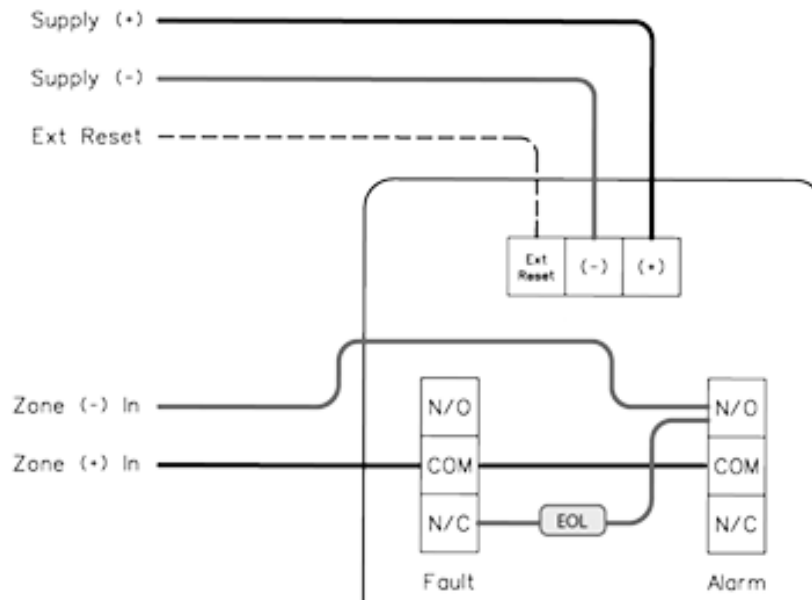


All relays are shown in operational state.


Fault relays are normally energized and will de-energize upon fault or loss of power.

## Dimensions

### Fireray One

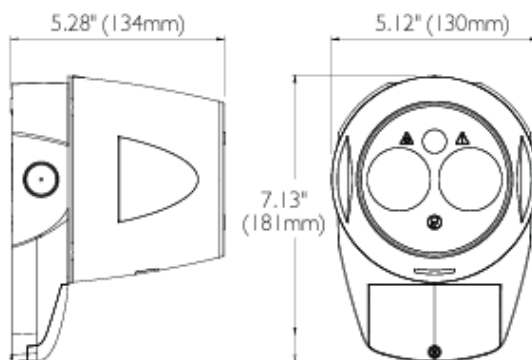

### Reflector

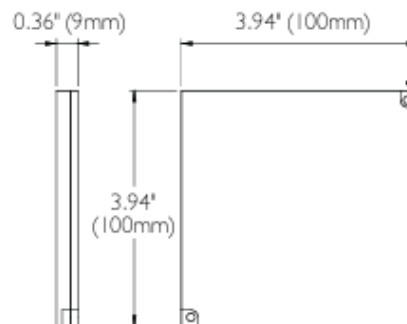

- Document # DS-FROne-1.0
- Copyright © 2022 Harding Instruments Co. Ltd.
- All Specifications are subject to change without notice
- Printed in Canada



9564 Yellowhead Trail NW  
Edmonton, Alberta, T5G 0W4  
[sales@harding-tech.com](mailto:sales@harding-tech.com)

Tel 780.462.7100  
Fax 780.450.8396  
[www.harding-tech.com](http://www.harding-tech.com)



Represented by: