


Description

The Fireray® 3000 End to End Infra-red Optical Beam Smoke Detector (OBSD) has been designed using the latest optical technology, incorporating modern industrial, electronic and software techniques. This detector offers cost effective protection of large, open area spaces with high ceilings. It is also very suited to applications where access to ceiling mounted smoke detectors presents practical difficulties.

The Fireray® 3000 is ideal for applications where line of sight for the IR (infra-red) detection path is narrow and where the building structure uses reflective surfaces. It has also been designed to be aesthetically pleasing and thus can equally suit modern architectural buildings as well as historical sites, particularly where ornate ceilings exist.



Dimensions

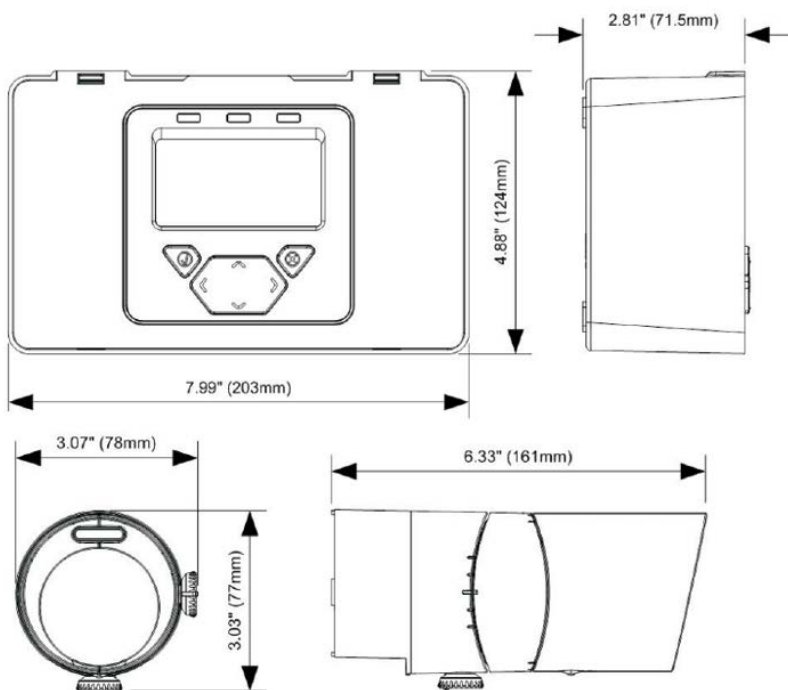

Features

- Patented Light Cancellation Technology (LCT) cancels unwanted light, including sunlight, sodium lamps and fluorescent lighting.
- Separate Transmitter and Receiver Heads
- Range 16.5 to 393 feet, configurable per set of Detectors
- Lateral Spacing per NFPA 72 is 60 feet
- Integral Laser Alignment in Receiver
- 2-wire Interface between Controller and Receiver
- Single and Twin Channel capability
- Separate Fire and Fault Relays per Detector
- Low Level Controller with LCD display
- Programmable Sensitivity and Fire Threshold
- Automatic Gain Control (AGC) for drift compensation
- Built-in electronic UL/ULC obscuration-acceptance fire test
- Knockouts for ease of installation and wiring
- Optional Transmitter powering from Controller

• Document # DS-FR3000-1.0 • Copyright © 2022 Harding Instruments Co. Ltd. • All Specifications are subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW
Edmonton, Alberta, T5G 0W4
sales@harding-tech.com
Tel 780.462.7100
Fax 780.450.8396
www.harding-tech.com



Represented by:



Fireray

Fireray 3000

Optical Smoke Detector

Technical Specification

Operating Range:	16.5 ft 393 ft (5 to 120m)
Operating Voltage Range:	12 to 36V DC $\pm 10\%$
Operating Controller Current (with 1 or 2 Receivers):	14mA (constant)
Operating Transmitter Current:	8mA (per Transmitter)
Power Down Reset Time:	>20 seconds
Fire and Fault Relay Contacts:	Resistive VFCO 2A @ 30 Volts DC
Operating Temp. (non-condensing): UL	-4°F to +131°F (-20°C to +55°C)
Optical Wavelength:	850nm
LED Indications:	
- Control Unit	Red = Fire Amber = Fault Green = System OK
- Receiver	Alignment LEDs for single person alignment.
IP Rating:	IP54
Relative Humidity (non-condensing):	93%
Parts List (System):	1 x Transmitter (clear lens) 1 x Receiver (dark lens) 1 x Control Unit
Parts List (Additional Detector):	1 x Transmitter (clear lens) 1 x Receiver (dark lens)
Housing Material (Transmitter/Receiver/Controller):	UL94 V2 PC
Cabling between each Receiver and Controller:	18-14 AWG 1-Pair Twisted, Jacketed
Maximum Cable Distance between Receiver & Controller:	330 Feet (100m)
Dimension & Weight	
Control Unit:	7.99 x 4.88 x 2.81in (W x H x D) 1.34lbs
Transmitter & Receiver	3.07 x 3.03 x 6.33in (W x H x D) 0.456lbs

Engineering Specification

The projected beam type smoke detector shall be listed to U.L. 268 and shall consist of up to two transmitters, two receivers and a single low-level remote-control unit. The detector shall operate between a range of 16.5 ft. to 393 ft. (5m to 120m). The temperature range of the system shall be -4°F to 131°F (-20°C to 55°C). The receiver shall include an integral built-in laser pointer to assist in optimum alignment.

The beam detector shall feature automatic gain control, which will compensate for gradual signal deterioration from dirt accumulation on the lenses. The receiver heads shall incorporate a Wide Field of View to ensure the unit is always receiving maximum signal available. The system shall include a low-level remote display and control unit with LCD read-out for set-up, reporting and testing of up to 2 separate sets of heads. The system shall be capable of sending separate Trouble and Alarm signals for each of the sets of heads. The system shall be capable of programming alarm thresholds of 25% to 60% in 1% increments. The system shall be capable of programming delay to fault and delay to alarm from 2 seconds to 30 seconds in 1 second increments.

Test and acceptance of the system shall be carried out by using the UL/ ULC approved internal electronic obscuration fire test. The projected beam type smoke detector shall be a 4-wire 24VDC device to be used with a Nationally Recognized Testing Laboratory's Listed and separately supplied 4-wire control panel. The End-to-End beam type smoke detector shall be a FFE Ltd. Fireray 3000.

Listing

- UL-S3417
- CSFM-7260-1508-105
- Maryland-2243
- ULC-S3417

• Document # DS-FR3000-1.0 • Copyright © 2022 Harding Instruments Co. Ltd. • All Specifications are subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Tel 780.462.7100
Edmonton, Alberta, T5G 0W4 Fax 780.450.8396
sales@harding-tech.com www.harding-tech.com



Represented by: