# **MicroComm DXI**



## **TSB-400 Telephone Set Board**

#### Description

The TSB-400 Telephone Set Board mounts in a DXI card cage and provides eight interfaces to standard 2500 set compatible DTMF telephones. These telephone sets can be configured to perform sub-master intercom station or administrative intercom functions. The TSB-400 ports can also be used to connect a MicroComm DXI intercom system to a PBX, through its CO telephone line ports, or other equipment, such as an auto dialer, that operates with standard telephone lines.

## **Features**


- eight telephone set interfaces
- drives standard 2500 set compatible DTMF telephone sets
- provides battery feed power to telephone set
- provides 90 Vac ringing signals to telephone set
- detects telephone hook switch status
- provides standard call progress tones such as dial tone, busy signals, and call waiting tones
- full duplex audio via standard  $600\Omega$  interface
- compatible with standard speakerphone sets
- detects and transmits standard DTMF tones
- optional caller ID signaling allows data to be sent to ٠ telephone sets with caller ID displays
- · transient and short circuit protection on all ports
- all field connections on rear of the card to expedite system • set up and maintenance
- quick release terminal output connectors
- 3 LED's indicate operating status
- internal fuse protects circuitry



## **Specifications**

Physical Form Factor	MicroComm DXI I/O Card
Environmental Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-40 to 158 °F (-40 to 70 °C)
Humidity	0 to 95 % non-condensing
Power Supply	$\pm 12$ Vdc $\pm 10\%$ provided by I/O Card Cage
Battery Feed Voltage	24 Vdc
Maximum Loop Current	40 mA
Ringing Voltage	90 Vac
Off-Hook Detection	Loop Start
Loop Impedance	600 ohm
Field Connections	DB-50 with quick release connector
Cabling	24-22 ga unshielded twisted pair
Standards	FCC Part 15 and Part 68, UL, CSA

## Mechanical

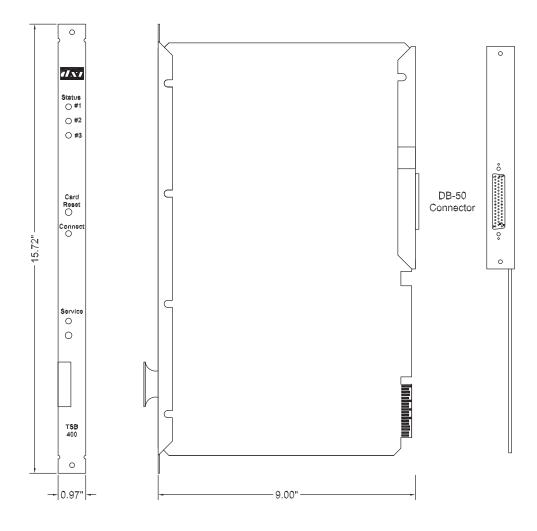

## **Ordering Information**

#### Part number TSB-400-A

- A Caller ID option
  - 0 none
  - 1 caller ID signaling

## Accessories

Field Interface Cable

CBL-170-A

Document # DS-TSB-400-1.4 • Copyright © 1999 Harding Instrument Co. Ltd. • All Specifications subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Edmonton, AB T5G OW4 sales@harding.ca Tel 780.462.7100 Fax 780.450.8396 www.harding.ca



Represented by: