

MicroComm



Description

The FDH-320 is a Full Duplex Handset Station that facilitates communication with master stations or other full duplex handset stations. FDH-320 handset stations are compatible with DXL SCC-300 station control cards.

These units are ruggedly constructed and include an armored handset cable (available in 4 lengths) or a 6-foot coiled cord. The FDH-320 also comes standard with a magnetic hook switch that generates a call request signal when the handset is taken off-hook.

Features

- full duplex audio channel
- hook switch sends automatic call request signal
- 11 ga heavy-duty brushed stainless steel faceplate
- rugged cable strain relief
- rugged metal handset cradle
- impact resistant handset
- mounts on standard 2 gang electrical boxes
- compatibility with all standard #6-32 mounting hardware allowing any type of security screw to be used

FDH-320 Full Duplex Handset Station




Specifications

Physical

	(114 x 114 x 45 mm)
Faceplate	
Heavy-duty	11 gauge brushed stainless steel
Environmental	
Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-40 to 158 °F (-40 to 70 °C)
Humidity	0 to 95 % non-condensing
Field Connections	pig tails with marrettes
Cabling	2 - 22 gauge shielded twisted pairs
	1 - 22 gauge twisted pair

4.5" H x 4.5" W x 2.00" D

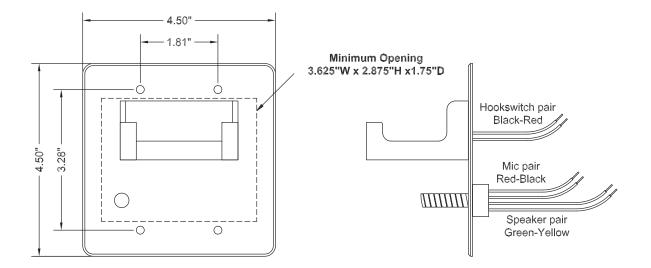

Ordering Information

Part number FDH-320-ABC-D

- A faceplate options
 - 2 2 gang heavy-duty (11 gauge)
- B handset switch
 - 0 none
- C handset cable (lengths are nominal)
 - 1 6 foot coiled cord
 - 2 20 inch armored
 - 3 32 inch armored
 - 4 48 inch armored
 - 6 72 inch armored (special order)
- D hook switch
 - 1 hook switch in cradle

Document # DS-FDH-320-1.1 • Copyright © 2017 Harding Instrument Co. Ltd. • All Specifications subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Edmonton, AB T5G 0W4 sales@harding.ca Tel 780.462.7100 Fax 780.450.8396 www.harding.ca





Represented by: