

MicroComm



Station Paging Microphone

Description

The SPM-420 Station Paging Microphone is used with the MicroComm DXI and DXL intercom systems to provide a stand alone microphone that can be used for paging. The handheld push-to-talk switch allows the operator to establish and maintain a page to a specified page zone.

Features

- high quality handheld electret microphone with push-totalk switch
- durable microphone cord that can extend up to 6 feet
- microphone comes in a robust casing made of high impact plastic
- mounts with standard 2-gang electrical box
- field connections consist of a single pair of wires
- compatible with DXL/DXI 400 series station ports



Specifications

Physical

Faceplate11 gaHeavy-duty11 gaEnvironmental32 toOperating Temperature32 toStorage Temperature-40 trHumidity0 to 9Field Connections4 pinCabling22 ga

4.5" H x 4.5" W x 1.75" D (114 x 114 x 45 mm)


11 ga brushed stainless steel


32 to 122 °F (0 to 50 °C) -40 to 158 °F (-40 to 70 °C) 0 to 95 % non-condensing

4 pin MTA100 connector

22 ga shielded twisted pair 2500 ft (750 m) maximum length

Mechanical

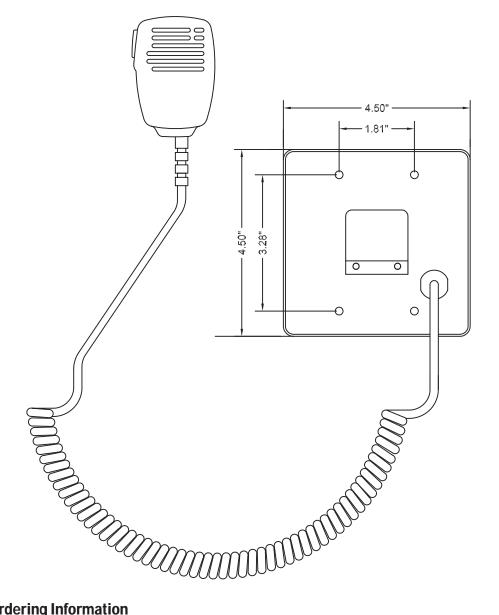



Ordering Information

SPM-420

Document # DS-SPM-420-1.4 • Copyright © 2008 Harding Instrument Co. Ltd. • All Specifications subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Edmonton, AB T5G OW4 sales@harding.ca

Tel 780.462.7100 Fax 780.450.8396 www.harding.ca





Represented by: